

STANDARD CONDUIT

CORRUGATED

- ▶ Manufactured from flexible HDPE
- ▶ Rugged corrugated design is flexible and light weight, yet provides excellent crush resistance
- ▶ Outstanding long-term cable protection from shifting ground, rock, and root impingement
- ▶ Provides a permanent pathway, simplifies future cable repairs or replacement
- ▶ Factory pre-installed Bull-Line™ Pull Tape with EVEN-LOAD™, ensures extra slack at any access point throughout the reel. Available 500lb–6,000lb tensile strength or locatable. Comes standard on 2"; is available for 1"-1 1/2"

INSTALLATION TYPES

Existing Conduit
Short Runs


SIZES RANGE

1" 1 1/2"
1 1/4" 2"

STANDARD COLORS



custom colors available

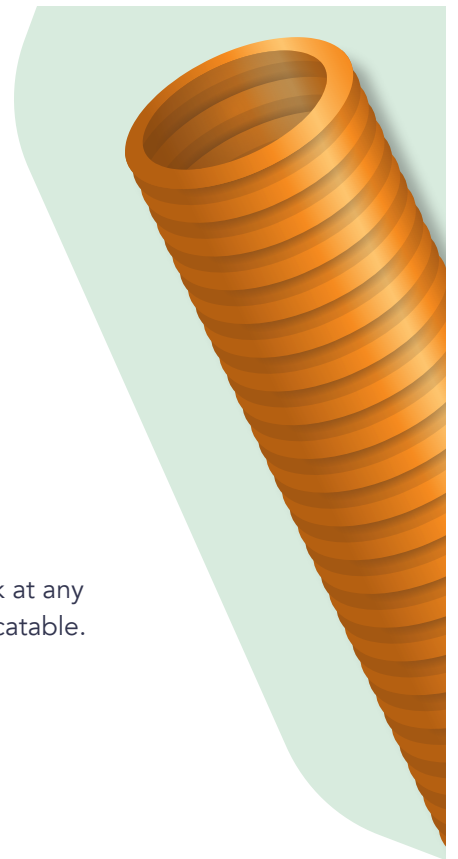

FEATURES

STANDARD

MATERIAL Manufactured from flexible HDPE (High Density Polyethylene)

SPECIFICATIONS All Corrugated conduit dimensions meet or exceed ASTM D-3350

CONDUIT MARKINGS Permanent marking along conduit includes: material, relevant standards, production info, and sequential feet or meter markings. Custom options available.

OPTIONS

PRE-INSTALLED TAPE Factory pre-installed Bull-Line™ Pull Tape with EVEN-LOAD™ ensures extra slack at any access point throughout the reel. Available 500lb–6,000lb tensile strength or locatable.

UV PROTECTANT UV protectant available for above ground applications




An Orbia Connectivity Solutions business.

+1 800 847 7661
WWW.DURALINE.COM

TL9000



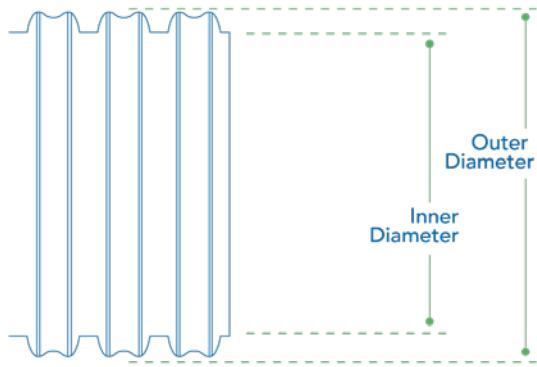





CORRUGATED TECHNICAL SPECIFICATIONS

NOMINAL SIZE	NOMINAL OD (IN)	ID REF (IN)	MIN WALL THICK (IN)	BRITTLENESS TEMP	WEIGHT (#/FT)
1"	1.385	1.085	0.045	-60° C	0.042
1 1/4"	1.570	1.440	0.045	-60° C	0.059
1 1/2"	1.824	1.670	0.055	-60° C	0.063
2"	2.490	2.045	0.020	-60° C	0.097

Note: All sizes meet UL 2024 4" bend radius standard.

NOMINAL SIZE	COLOR	PART NUMBER
2"		20003440
2"		20004740
2"		20004739
2"		20003441