

STANDARD ACCESSORIES


LUBADUK®

- ▶ Reduced cable tension – up to 74% less friction and 50% less pulling tension than with other lubricants – greatly reduces the wear on cable pulling equipment and improves safety
- ▶ Increased pull lengths mean fewer setups
- ▶ Cost-saving – fewer pull boxes needed
- ▶ Direct application into the duct before the pull reduces wear on cable pulling equipment
- ▶ Unique shear-sensitive carrying agent holds a dispersion of silicone oil and microspheres in suspension.
- ▶ Microspheres are tiny ball bearings, with diameters between .010" and .020", which keep friction between cable and conduit extremely low
- ▶ Available in Summer or Winter grade (-40°F)
- ▶ UL listed



ELECTRICAL CABLES FRICTION FACTORS FOR BENDS

High Sidewall Bearing Pressure

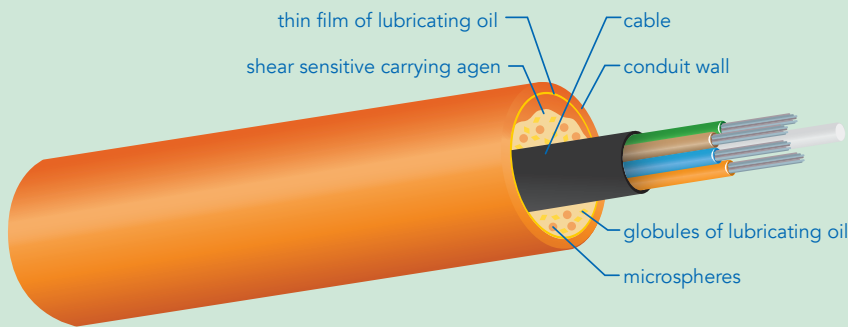

	12 QTS (CS)	(6) 1 GAL (CS)	5 GAL PAIL	55 GAL DRUM
LUBADUK Summer	20000349	20000351	20000353	
LUBADUK Winter	20000350	20000352	20000354	20000356
Shipping Weights	27 lbs	55 lbs	42 lbs	497 lbs